SAMSUNG
ELECTRONICS

Approval

Customer : GA   **DATE : 16. Mar. 2010**

SAMSUNG TFT-LCD

MODEL : LTA320AP08-W

Any Modification of Specification is not allowed without SEC's Permission.

NOTE :

Customer's *Approval*		APPROVAED BY	DATE 16.Mar.2010
SIGNATURE	DATE	*Jeong min Heo*	
		PREPARED BY **Sunok.SONG**	DATE 16.Mar.2010

LCD Business

Samsung Electronics Co . , LTD.

MODEL	LTA320AP08	Doc. No	06−000−S−100316	Page	**1/29**

Contents

| MODEL | LTA320AP08 | Doc. No | 06-000-S-100316 | Page | **2/29** |

Revision History

Date	Rev. No	Page	Summary
Mar 16, 2010	000	all	First issued

General Description

Description

LTA320AP08 is a color active matrix liquid crystal display (LCD) that uses amorphous silicon TFT(Thin Film Transistor) as switching components. This model is composed of a TFT LCD panel, a driver circuit and a back light unit. The resolution of a 32.0" is 1366 x 768 and this model can display up to 16.7 million colors with wide viewing angle of 89° or higher in all directions. This panel is intended to support applications to provide a excellent performance for Flat Panel Display such as Home-alone Multimedia TFT-LCD TV and High Definition TV.

Features

- RoHS compliance (Pb-free)
- High contrast & aperture ratio with wide color gamut
- PVA(Patterned Vertical Align) mode
- Wide viewing angle (±178°)
- High speed response
- HD resolution (16:9)
- Low Power consumption
- U-Type 4 CCFLs (Cold Cathode Fluorescent Lamp)
- Sync Format: DE (Data Enable) mode
- LVDS (Low Voltage Differential Signaling) interface (1pixel/clock)

General Information

Items	Specification	Unit	Note
Module Size	760.0(H_{TYP}) x 450.0(V_{TYP})	mm	±1.0mm
	50.2(D_{MAX})		With Inverter
Weight	5100 (max)	g	With Inverter
Pixel Pitch	0.51075(H) x 0.51075(W)	mm	
Active Display Area	697.6845(H) x 392.256(V)	mm	
Surface Treatment	Haze 7%, Hard-Coating (3H)	-	
Display Colors	8 bit , 16.7M	colors	
Number of Pixels	1366 x 768	pixel	
Pixel Arrangement	RGB Horizontal stripe	-	
Display Mode	Normally Black	-	
Luminance of White	400 (Typ.)	cd/m^2	

MODEL	LTA320AP08	Doc. No	06-000-S-100316	Page	4/29

1. Absolute Maximum Ratings

If the condition exceeds maximum ratings, it can cause malfunction or unrecoverable damage to the device.

Item		Symbol	Min.	Max.	Unit	Note
Power Supply Voltage		V_{DD}	10.8	*13.2*	V	(1)
Storage temperature		T_{STG}	-20	65	℃	(2)
Glass surface temperature (Operation)	Center	T_{OPR}	0	50	℃	(2),(5)
	T. Uniformity	△T	-	10	℃	
Shock (non - operating)		S_{nop}	-	50	G	(3)
Vibration (non - operating)		V_{nop}	-	1.5	G	(4)

Note (1) Ta= 25 ± 2 °C, V_{DD} =12V
    (2) Temperature and relative humidity range are shown in the figure below.
       a. 90 % RH Max. (Ta ≤ 39 °C)
       b. Relative Humidity is 90% or less. (Ta > 39 °C)
       c. No condensation
    (3) 20ms, sine wave, one time for ±X, ±Y, ±Z axis
    (4) 10-300 Hz, Sweep rate 11min, 30min for X,Y,Z axis

Fig. Temperature and Relative humidity range

MODEL	LTA320AP08	Doc. No	06−000−S−100316	Page	**5/29**

(5) Definition of test point

5mm

5mm

LCD Module (Active)

① ②
⑤
③ ④
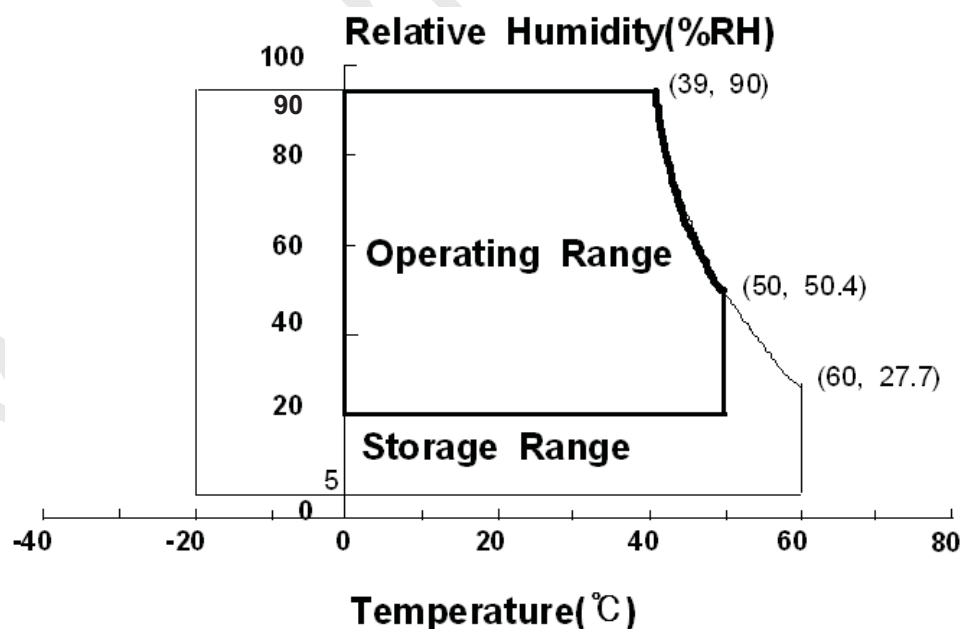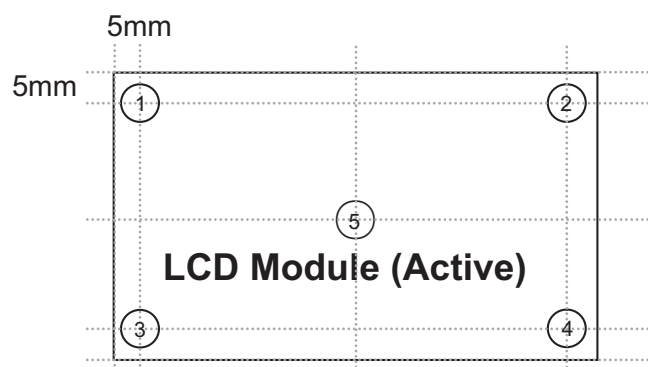
$\triangle T$ should be less than $10 \, ^\circ\!C$ ($\triangle T = | T_{OPR} - T_{MAX} |$)

T_{OPR} : Temperature of the center of the glass surface (Test point 5)
$T1 \sim T4$: Temperature of each edge of the glass surface
T_{MAX} : The highest temperature of the glass surface

MODEL	LTA320AP08	Doc. No	06-000-S-100316	Page	**6/29**

2. Optical Characteristics

The optical characteristics should be measured in a dark room or equivalent.
Measuring equipment : TOPCON RD-80S,TOPCON SR-3, ELDIM EZ-Contrast

(Ta = 25 ± 2°C, VDD=12V,   fv= 60 Hz, f_{DCLK}=78 MHz , Inverter=62.5KHz,Duty 100%)

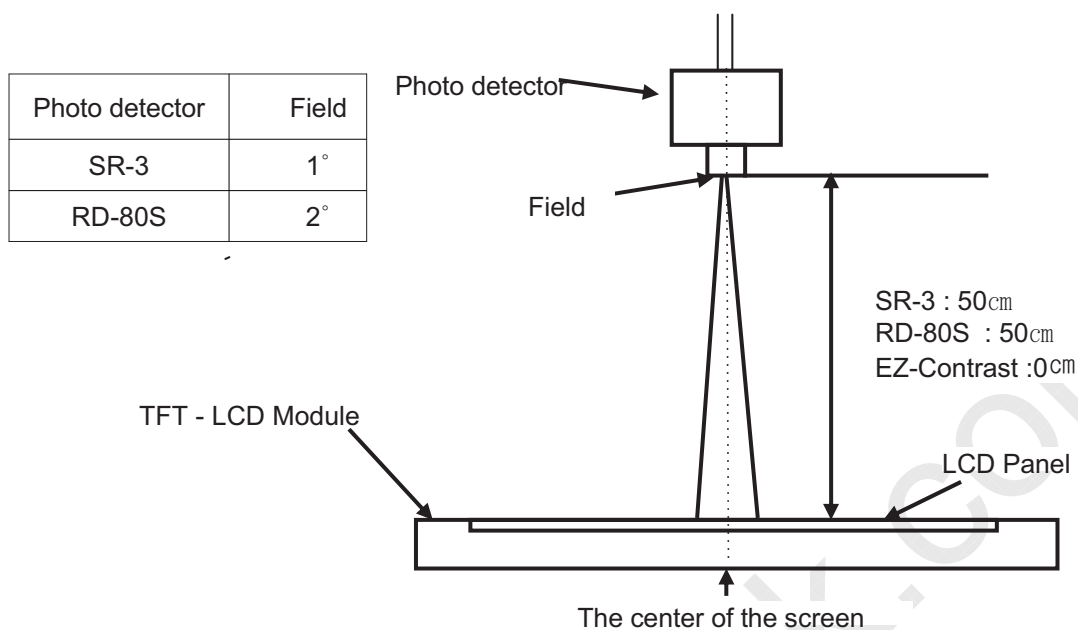| Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio (Center of screen)		C/R		-	5000	-		(1) SR-3
Response Time	G-to-G (Avg)	Tg		-	8	16	msec	(3) RD-80S
Luminance of White (Center of screen)		Y_L	Normal θL,R=0 θU,D=0 Viewing Angle	350	400	-	cd/m²	(4) SR-3
Color Chromaticity (CIE 1931)	Red	Rx		TYP. -0.03	0.640	TYP. +0.03		(5),(6) SR-3
		Ry			0.340			
	Green	Gx			0.300			
		Gy			0.600			
	Blue	Bx			0.150			
		By			0.060			
	White	Wx			0.280			
		Wy			0.290			
Color Gamut		-		-	72	-	%	(5) SR-3
Color Temperature		-		-	10,000	-	K	(5) SR-3
Viewing Angle	Hor.	θL	C/R≥10	79	89	-	Degree	(6) EZ-Contrast
		θR		79	89	-		
	Ver.	θU		79	89	-		
		θD		79	89	-		
Brightness Uniformity (9 Points)		B_{uni}		-	-	25	%	(2) SR-3

- Test Equipment Setup

The measurement should be executed in a stable, windless and dark room between
40min and 60min after lighting the back light at 25 ± 2°C for stabilization
of the back light. This should be measured in the center of screen.

Environment condition : Ta = 25 ± 2 °C

MODEL	LTA320AP08	Doc. No	06-000-S-100316	Page	**7/29**

Photo detector	Field
SR-3	1°
RD-80S	2°

Photo detector

Field

SR-3 : 50㎝
RD-80S : 50㎝
EZ-Contrast :0㎝

TFT - LCD Module

LCD Panel

The center of the screen

- Definition of test point

Active Area

○ Test Point
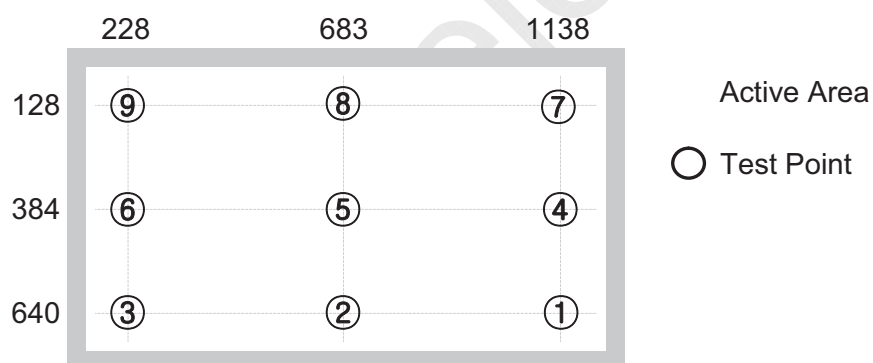
Note (1) Definition of Contrast Ratio (C/R)
      : Ratio of gray max (Gmax) & gray min (Gmin) at the center point ⑤ of the panel

$$C / R = \frac{G \max}{G \min}$$

Gmax : Luminance with all pixels white
Gmin : Luminance with all pixels black

MODEL	LTA320AP08	Doc. No	06-000-S-100316	Page	8/29

Note (2) Definition of 9 points brightness uniformity (Test pattern : Full White)

$$Buni = 100*\frac{(B\max - B\min)}{B\max}$$

Bmax : Maximum brightness
Bmin : Minimum brightness

Note (3) Definition of Response time : Sum of Tr, Tf

Display data

| Black (data off) | White (data on) | Black (data off) |

Optical Instruments Response

100%
90%

T_R T_F

10%
0%
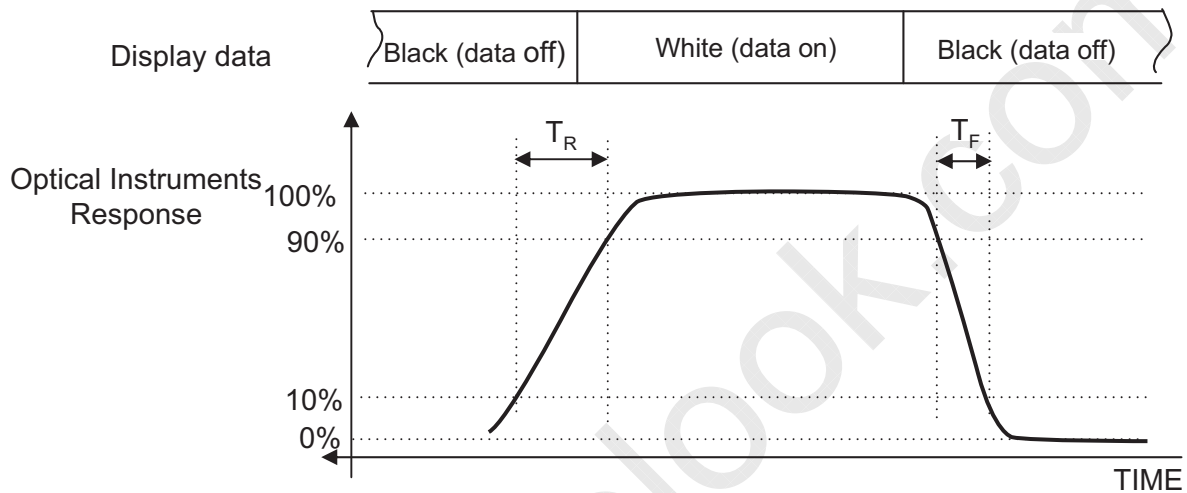
TIME

※ G-to-G : Average response time between Gray to gray (scale)

Note (4) Definition of Luminance of White : Luminance of white at center point ⑤

Note (5) Definition of Color Chromaticity (CIE 1931)
Color coordinate of Red, Green, Blue & White at center point ⑤

Note (6) Definition of Viewing Angle
: Viewing angle range (C/R ≥10)

Θ_U
Θ_R
Θ_L
Θ_D

| MODEL | LTA320AP08 | Doc. No | 06-000-S-100316 | Page | 9/29 |

3. Electrical Characteristics

3.1 TFT LCD Module

The connector for display data & timing signal should be connected.

Ta = 25°C $\pm$ 2 °C

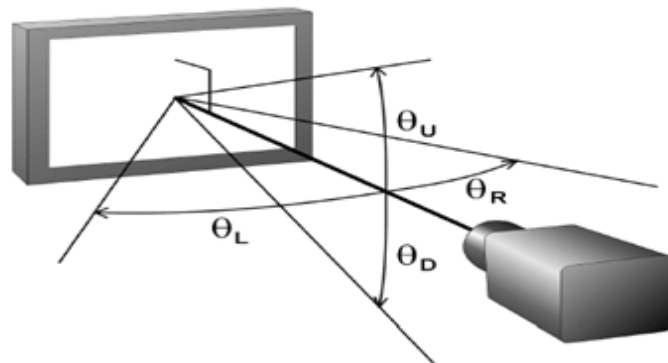| Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V_{DD}	10.8	12.0	13.2	V	(1)
Current of Power Supply	(a) Black	I_{DD}	250	450	650	mA	(2),(3)
	(b) White		250	450	650	mA	
	(c) V-Stripe		500	700	900	mA	
Vsync Frequency		f_V	48	60	66	Hz	
Hsync Frequency		f_H	44	48	53	kHz	
Main Frequency		f_{DCLK}	72	78	85	MHz	
Rush Current		I_{RUSH}	-	-	4	A	(4)

Note (1) The ripple voltage should be controlled under 10% of V_{DD}.
　　(2) f_V= 60 Hz, f_{DCLK} = 78 MHz, V_{DD} = 12.0V, DC Current.
　　(3) Power dissipation check pattern (LCD Module only)

　　a) Black Pattern　　b) White Pattern　　c) V-Stripe

(4) Measurement Conditions

T_{RUSH}=470μs
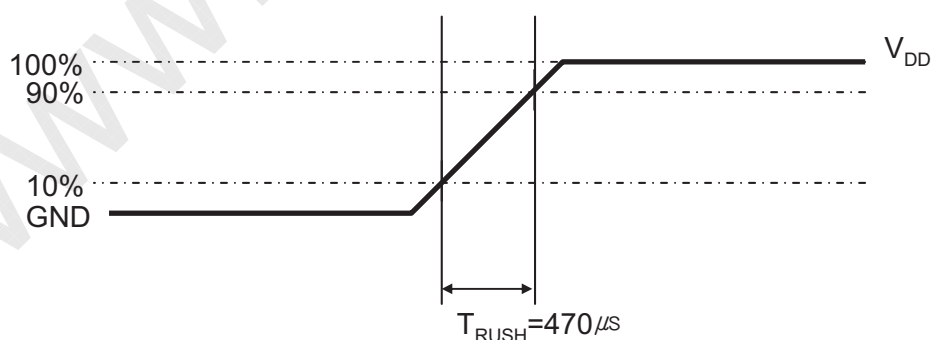
Rush Current I_{RUSH} can be measured when T_{RUSH}. is 470μs.

MODEL	LTA320AP08	Doc. No	06-000-S-100316	Page	**10/29**

3.2 Back Light Unit

The back light unit consists of 4 U-type CCFLs
(Cold Cathode Fluorescent   Lamp).

Ta=25 $\pm$ 2°C
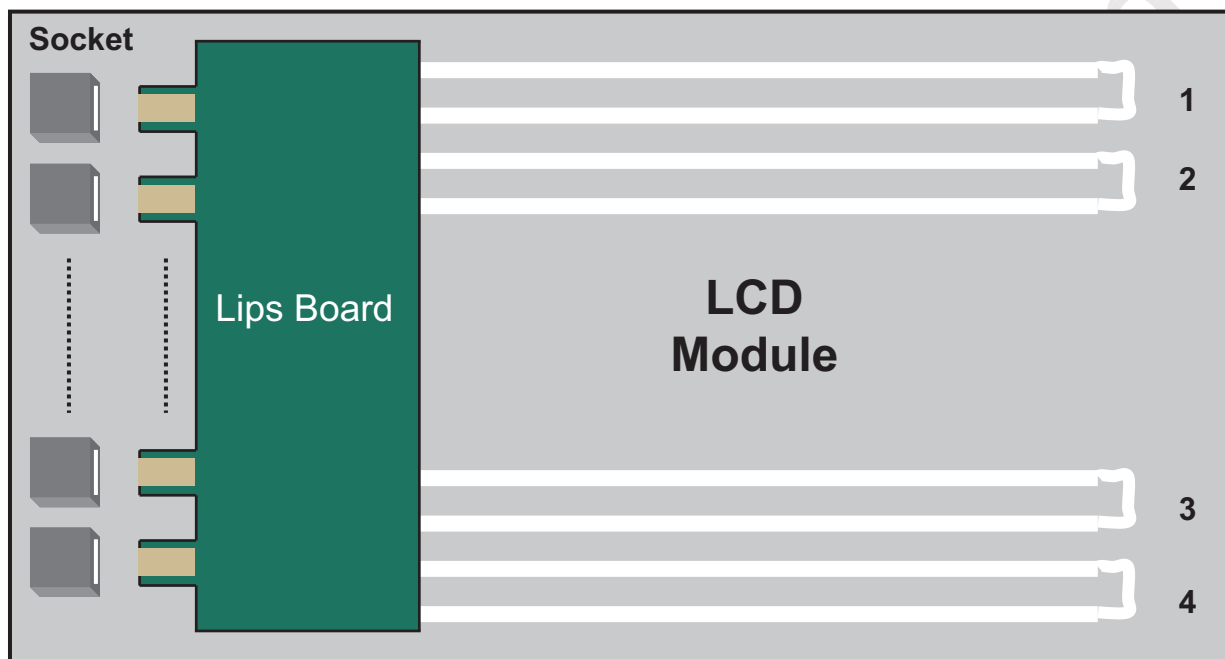
Item	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Life Time	Hr	-	50000	-	Hour	(1)

Note (1) It is defined as the time to take until the brightness reduces to 50% of its original value.

[Operating condition : Ta = 25$\pm$2℃, For single lamp only.]

MODEL	LTA320AP08	Doc. No	06-000-S-100316	Page	11/29

3.3　Inverter Input Condition & Specification

Items	Symbol	Conditions	Specifications			Unit	Note
			Min.	Typ.	Max.		
Input Voltage	Vin	-	22.5	25	27.5	Vdc	Ta=25±2 °C
Input Current	Iin	Vin=24.0V Vdim=3.3V Ta=25℃	-	-	4.3	A	(1) / (2)
Frequency	F_{LAMP}	Vin=24.0 V	61	63	65	kHz	-
Backlight On/Off	ON	Vin=24.0 V	2.4	-	5.25	Vdc	-
	OFF	Vin=24.0 V	-0.3	-	0.8		-
External PWM Dimming Control	V_{High}		2.4	-	5.25	Vdc	(3),(4)
	V_{Low}		-0.3	-	0.4		
	$F_{EXT.PWM}$	Vin=24, Dim=100%	156	166	176	Hz	
	D_{pwm}		15	-	100	%	

Note) Power Consumption is measured when 450[cd/m^2] of luminance which is the typical luminance.
Lamp Current is measured at the point before Lamp.

(1) Max Value of the Power Consumption is measured during initial turn-on time* of the backlight.

(2) Max Value of the Power Consumption is measured after 60 min warm-up.

(3) When EX-DIM(Pin 14) is used, DIM(Pin13) has to be open or connected to ground.

(4) EX-PWM Frequency is selected not to interfere the Waterfall & Acoustic Noise.

* Initial turn-on time : From 0sec to 60min after turn-on

MODEL	LTA320AP08	Doc. No	06-000-S-100316	Page	**12/29**

(2) Lamp frequency which may produce interference with horizontal synchronous frequency may cause line flow on the display. Therefore lamp frequency should be detached from the horizontal synchronous frequency and its harmonics as far as possible in order to avoid interference.

(3) Life time (Hr) is defined as the time when brightness of a lamp unit itself becomes 50% or less than its original value at the condition of Ta = 25±2°C and I_L = 6.5 mArms

(4) Designing a system inverter intended to have better display performance, power efficiency and lamp reliability.

     They would help increase the lamp lifetime and reduce leakage current.

       a. The measurement should be done at typical lamp current.

       b. The asymmetry rate of the inverter waveform should be less than 10%.

       c. The distortion rate of the waveform should be $\sqrt{2}$ with ±10% tolerance.

         - Inverter output waveform had better be more similar to ideal sine wave.

■ Asymmetry rate

$$\frac{|I_p - I_{-p}|}{I_{rms}} \times 100$$

■ Distortion rate
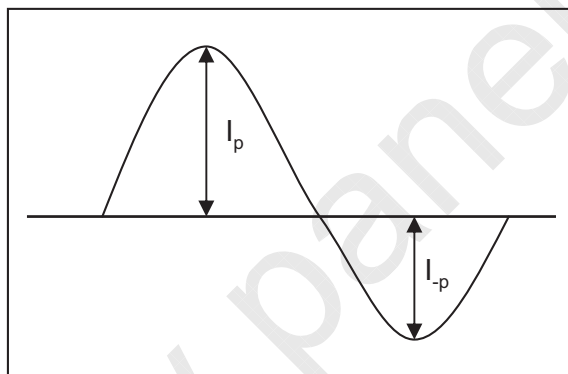
$$\left|\frac{I_p}{I_{rms}}\right| \quad or \quad \left|\frac{I_{-p}}{I_{rms}}\right|$$

Fig. Wave form of the inverter

(5) If an inverter has shutdown function, it should keep its output for over 1 second even if the lamp connector is open. Otherwise the lamps may not be turned on.

MODEL	LTA320AP08	Doc. No	06-000-S-100316	Page	**13/29**

3.4. Inverter input pin configuration (Connector : 20022WR-14AML→ Yeon-HO)

PIN NO	SYMBOL	FUNCTION
1	Vin	Power Supply(25V)
2	Vin	
3	Vin	
4	Vin	
5	Vin	
6	GND	Ground
7	GND	
8	GND	
9	GND	
10	GND	
11	Error out	Error out (Normal: GND, Abnormal: open collector)
12	ENA	Enable (Backlight on ~ off)
13	NC	Not use
14	Ext. Dim	External PWM dimming signal(Pulse)

3.5. Inverter Input Power Sequence
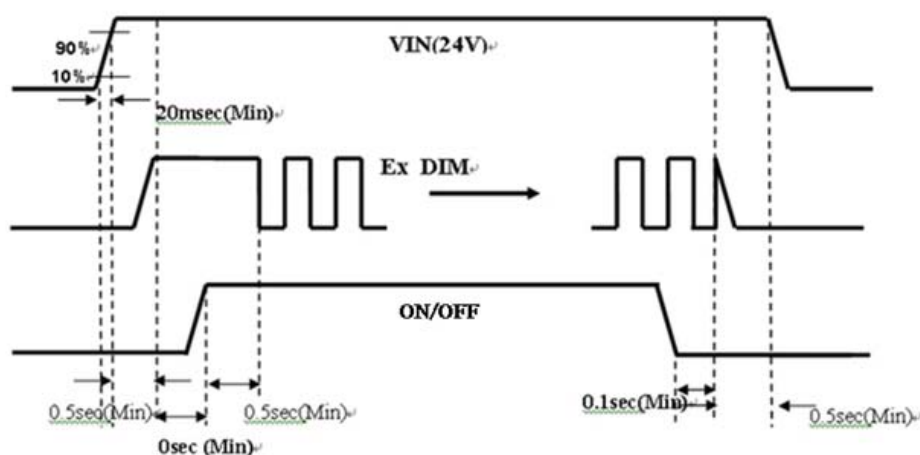
Note)   SEQUENCE :   On = Vin(25V) > Dimming Control≥ Backlight On/off

OFF = Backlight On/Off ≥ Dimming Control > Vin(24V)

MODEL	LTA320AP08	Doc. No	06-000-S-100316	Page	**14/29**

4. Input Circuit Pin Assignment

4.1. Input Signal

Connector : 196260-30041 → P-TWO

PIN No.	Description	PIN No.	Description
1	N.C	16	GND
2	N.C	17	LV3_N_I
3	N.C	18	LV3_P_I
4	GND	19	GND
5	LV0_N_I	20	NC
6	LV0_P_I	21	JEIDA/NORMAL
7	GND	22	WPN
8	LV1_N_I	23	NC
9	LV1_P_I	24	NC
10	GND	25	GND
11	LV2_N_I	26	
12	LV2_P_I	27	
13	GND	28	12V
14	LVCLK_N_I	29	
15	LVCLK_P_I	30	

Note1) No Connection: This PINS are only used for SAMSUNG internal using.
Note2) LVDS OPTION : If this PIN is HIGH (3.3 V) → Normal LVDS format
                                             LOW (GND) →   JEIDA LVDS format
          SEQUENCE   : On = V_{DD}(T1) → LVDS Option → Interface Signal(T2)
                                    OFF = Interface Signal(T3) → LVDS Option → V_{DD}

Note(1) Pin number starts from Left side

PCB

Pin No. 1   Pin No. 30

#1   #30

#1   #30
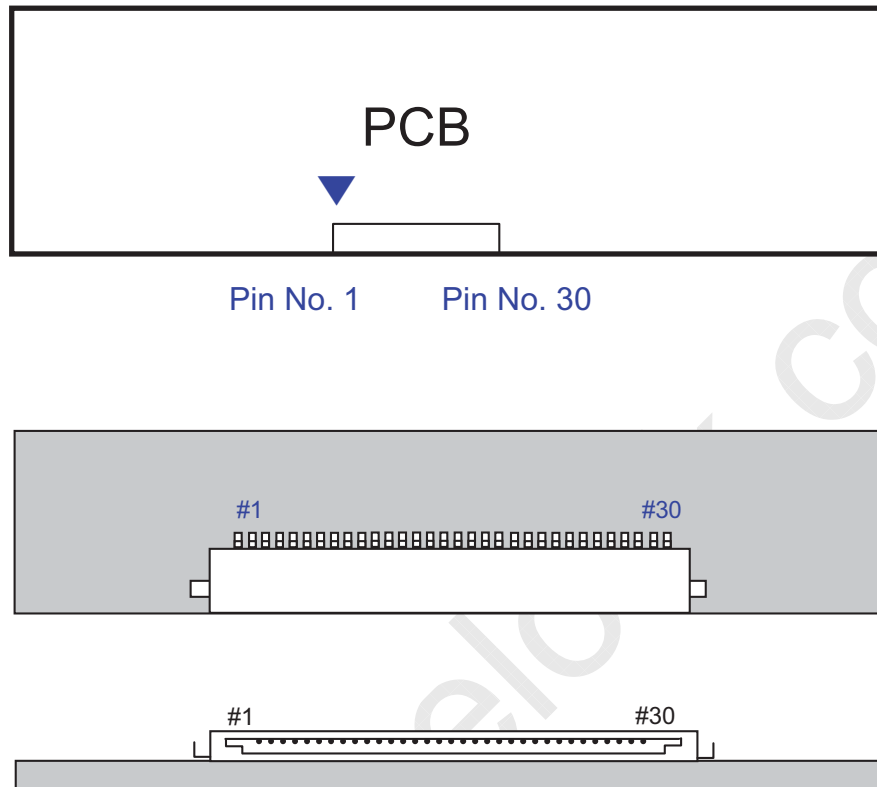
Fig. Connector diagram

a. Power GND pins should be connected to the LCD's metal chassis.
b. All power input pins should be connected together.
c. All NC pin should be separated from other signal or power.

| MODEL | LTA320AP08 | Doc. No | 06−000−S−100316 | Page | **16/29** |

4.2 LVDS Interface
- LVDS Receiver : Tcon (merged)
- Data Format (JEIDA & Normal)

	LVDS pin	JEIDA -DATA	VESA -DATA
TxOUT/RxIN0	TxIN/RxOUT0	R2	R0
	TxIN/RxOUT1	R3	R1
	TxIN/RxOUT2	R4	R2
	TxIN/RxOUT3	R5	R3
	TxIN/RxOUT4	R6	R4
	TxIN/RxOUT6	R7	R5
	TxIN/RxOUT7	G2	G0
TxOUT/RxIN1	TxIN/RxOUT8	G3	G1
	TxIN/RxOUT9	G4	G2
	TxIN/RxOUT12	G5	G3
	TxIN/RxOUT13	G6	G4
	TxIN/RxOUT14	G7	G5
	TxIN/RxOUT15	B2	B0
	TxIN/RxOUT18	B3	B1
TxOUT/RxIN2	TxIN/RxOUT19	B4	B2
	TxIN/RxOUT20	B5	B3
	TxIN/RxOUT21	B6	B4
	TxIN/RxOUT22	B7	B5
	TxIN/RxOUT24	HSYNC	HSYNC
	TxIN/RxOUT25	VSYNC	VSYNC
	TxIN/RxOUT26	DEN	DEN
TxOUT/RxIN3	TxIN/RxOUT27	R0	R6
	TxIN/RxOUT5	R1	R7
	TxIN/RxOUT10	G0	G6
	TxIN/RxOUT11	G1	G7
	TxIN/RxOUT16	B0	B6
	TxIN/RxOUT17	B1	B7
	TxIN/RxOUT23	RESERVED	RESERVED

MODEL	LTA320AP08	Doc. No	06-000-S-100316	Page	**17/29**

4.3 Input Signals, Basic Display Colors and Gray Scale of Each Color

COLOR	DISPLAY (8bit)	R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7	GRAY SCALE LEVEL
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	-
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	-
	CYAN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	MAGENTA	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	-
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	-
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0
	DARK ↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:			:	:	:	:	:	:	:		R3~
	↓	:	:	:	:	:	:	:	:	:	:	:	:	:	:			:	:	:	:	:	:	:		R252
	LIGHT	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R253
		0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R254
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R255
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0
	DARK ↑	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1
		0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G2
		:	:	:	:	:	:			:	:	:	:	:				:	:	:	:	:	:			G3~
	↓	:	:	:	:	:	:			:	:	:	:	:				:	:	:	:	:	:			G252
	LIGHT	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G253
		0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G254
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G255
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0
	DARK ↑	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	B1
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	B2
		:	:	:	:	:	:			:	:	:	:	:				:	:	:	:	:	:			B3~
	↓	:	:	:	:	:	:			:	:	:	:	:				:	:	:	:	:	:			B252
	LIGHT	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	B253
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	B254
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	B255

Note) Definition of Gray :
Rn : Red Gray, Gn : Green Gray, Bn : Blue Gray (n = Gray level)
Input Signal : 0 = Low level voltage, 1 = High level voltage

MODEL	LTA320AP08	Doc. No	06-000-S-100316	Page	**18/29**

5. Interface Timing

5.1 Timing Parameters （DE only mode）

SIGNAL	ITEM	SYMBOL	MIN.	TYP.	MAX.	Unit	NOTE
Clock	Frequency	$1/T_C$	72	78	85	MHz	-
Hsync		F_H	44	48	53	KHz	-
Vsync		F_V	48	60	66	Hz	-
Vertical Display Term	Active Display Period	T_{VD}	-	768	-	Lines	-
	Vertical Total	T_V	776	802	1200	Lines	-
Horizontal Display Term	Active Display Period	T_{HD}	-	1366	-	Clocks	-
	Horizontal Total	T_H	1460	1624	2000	clocks	-

Note) This product is DE only mode. The input of Hsync & Vsync signal does not have an effect on normal operation.
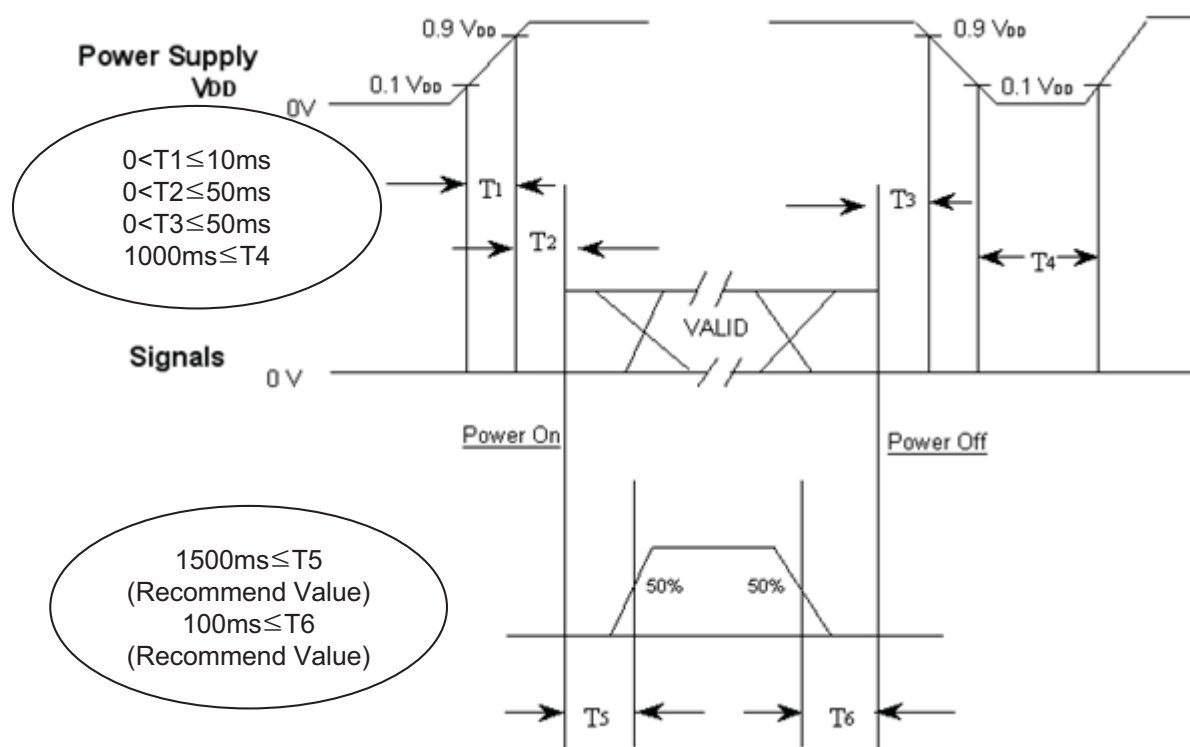(1) Test Point : TTL control signal and CLK at LVDS Tx input terminal in system
(2) Internal V_{DD} = 3.3V

| MODEL | LTA320AP08 | Doc. No | 06-000-S-100316 | Page | **19/29** |

5.2 Timing diagrams of interface signal (DE only mode)
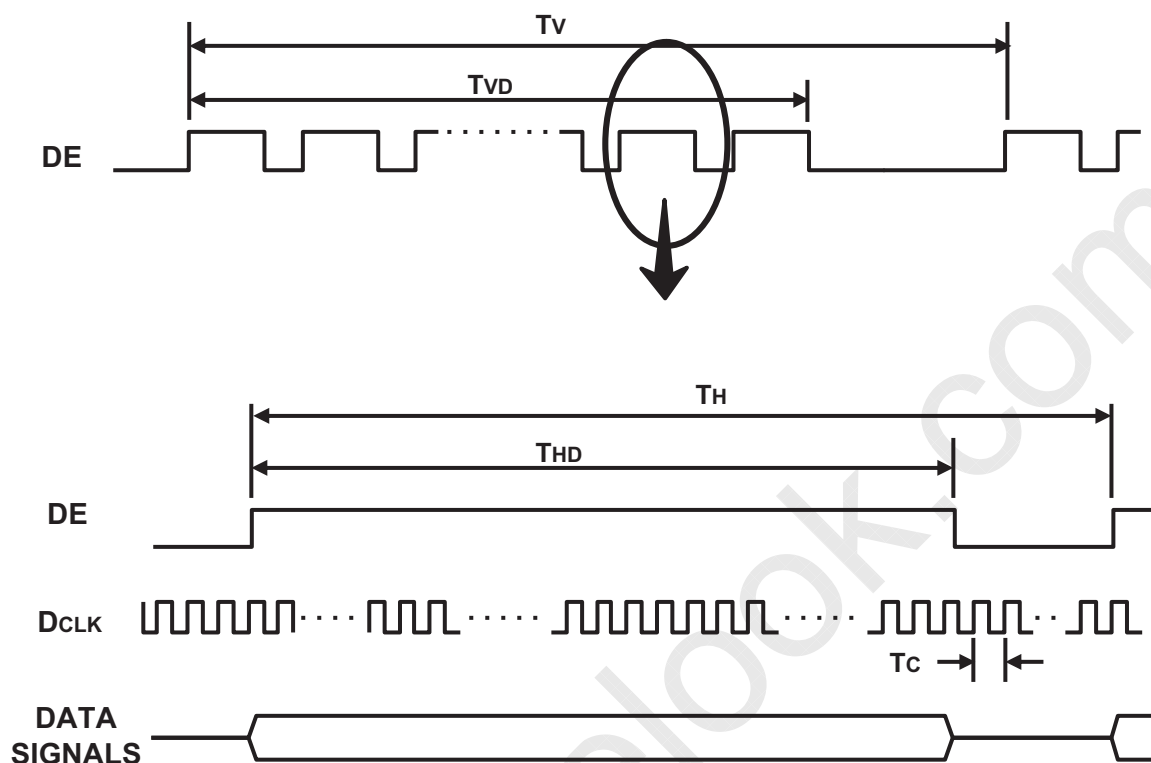
5.3 Power ON/OFF Sequence

To prevent a latch-up or DC operation of the LCD Module, the power on/off sequence should be as the diagram below.

Power Supply V_{DD}

0.9 V_{DD}
0.1 V_{DD}
0V

0<T1≤10ms
0<T2≤50ms
0<T3≤50ms
1000ms≤T4

Signals   0 V

VALID

Power On   Power Off

1500ms≤T5
(Recommend Value)
100ms≤T6
(Recommend Value)

50%   50%

T1 : V_{DD} rising time from 10% to 90%
T2 : The time from V_{DD} to valid data at power ON.
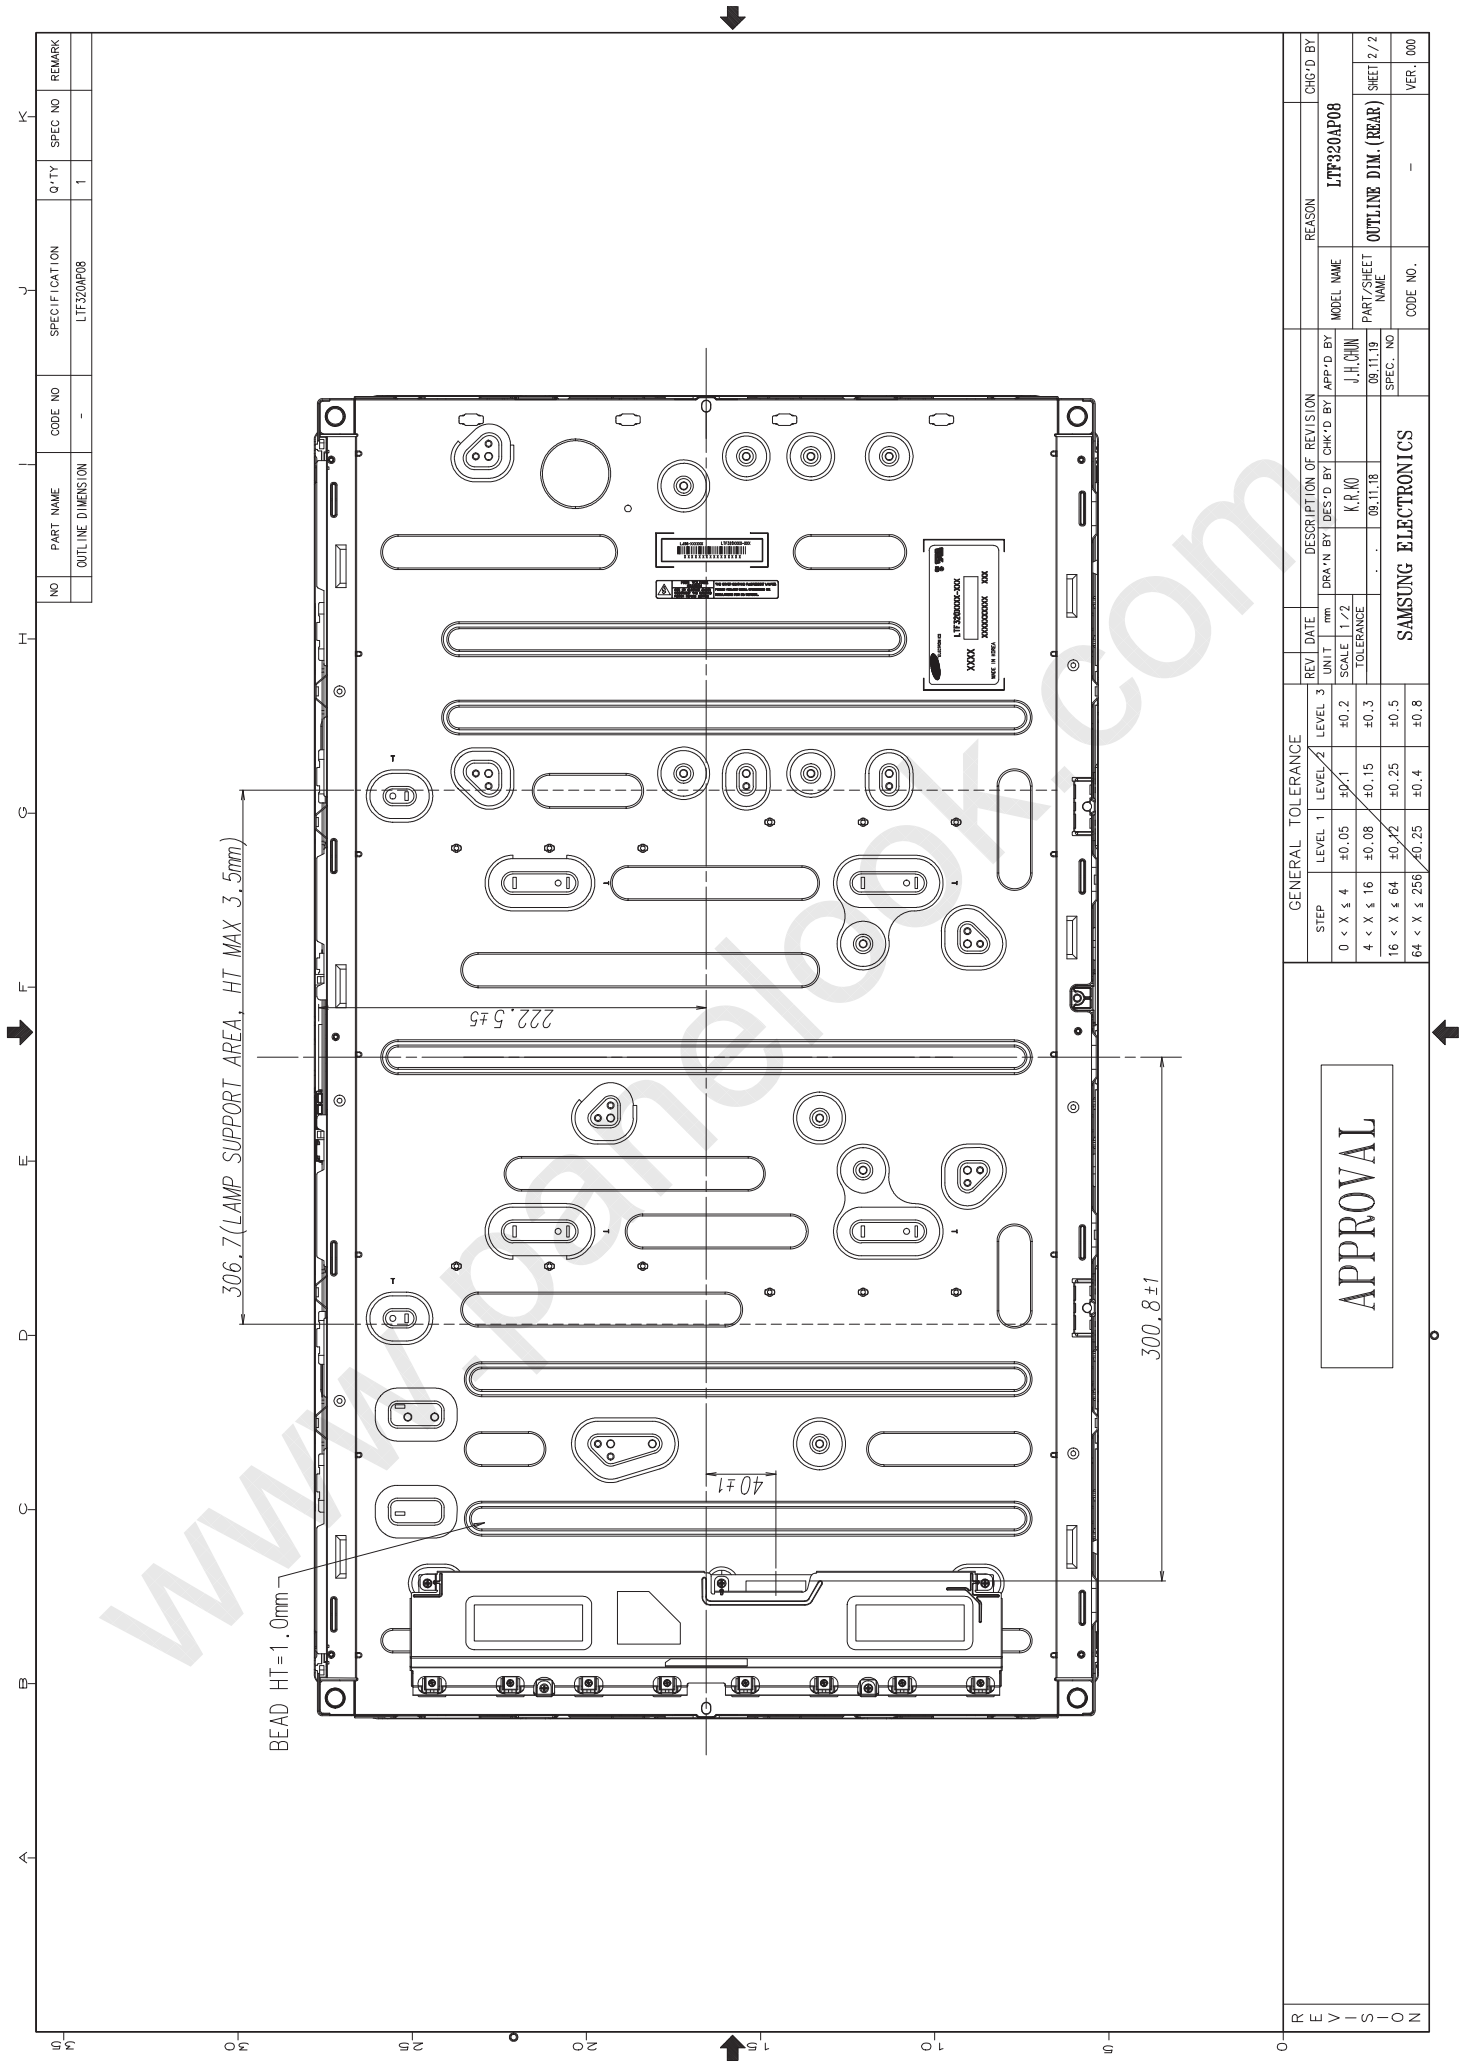T3 : The time from valid data off to V_{DD} off at power Off.
T4 : V_{DD} off time for Windows restart
T5 : The time from valid data to B/L enable at power ON.
T6 : The time from valid data off to B/L disable at power Off.

- The supply voltage of the external system for the Module input should be the same as the definition of V_{DD}.
- Apply the lamp voltage within the LCD operation range. When the back light turns on before the LCD operation or the LCD turns off before the back light turns off, the display may momentarily show abnormal screen.
- In case of V_{DD} = off level, please keep the level of input signals low or keep a high impedance.
- T4 should be measured after the Module has been fully discharged between power off and on period.
- Interface signal should not be kept at high impedance when the power is on.

| MODEL | LTA320AP08 | Doc. No | 06-000-S-100316 | Page | **21/29** |

SECTION B-B'

SECTION A-A'

SECTION C-C'

* NOTES
1. BACKLIGHT : 4U COLD CATHODE FLUORESCENT LAMPS.
2. I/F CONNECTOR SPECIFICATION.
   - MAKER : JAE
   - PART NO. : FI-E30S
3. INVERTER CONNECTOR SPECIFICATION
   - MAKER : JST
   - PART NO : S14B-PHA-SM
   - MAKER : JST
   - PART NO : S14B-PHA-SM
4. UNSPECIFIED TOLERANCE TO BE ±0.5.
5. ALLOWED DEPTH OF USERHOLE SCREW INSERTION IS 8.0 MAX
6. CALIFERS MEASURING FORCE : 750 ±250 gf
7. GAP BETWEEN TOP CHASSIS AND GLASS IS 1.2 mm MAX
8. WEIGHT : 5.1 Kg (Max 5.5Kg)
9. BLACK MATRIX SPEC
   - IA - AI ≤ 2.0 mm
   - IC - DI ≤ 2.0 mm

BLACK MATRIX

APPROVAL

ACTIVE CENTER

2-M4,USERHOLE(DP 8mm MAX)
2-M4,USERHOLE(DP 8mm MAX)
2-M4,USERHOLE(DP 8mm MAX)
2-M4, USERHOLE (DP 8mm MAX)
2-DP 3mm MAX (USER HOLE GUIDE)
2-DP 3mm MAX (USER HOLE GUIDE)
2-M4,DP 8mm MAX (USERHOLE)
2-M4,DP 8mm MAX (USERHOLE)

450±1 (OUTLINE)
213±0.5
392.256 (ACTIVE AREA)
399±1 (BEZEL OPENING)
760±1 (OUTLINE)
697.6845 (ACTIVE AREA)
703.6±1 (BEZEL OPENING)
368±0.5
368±0.5
135±0.5
135±0.5
210±0.5
210±0.5
210±0.5
210±0.5
144±0.5
144±0.5
102±0.5
102±0.5
171.5±0.5
171.5±0.5
171.5±0.5
171.5±0.5

GENERAL TOLERANCE

STEP	LEVEL 1	LEVEL 2	LEVEL 3
0 < X ≤ 4	±0.05	±0.1	±0.2
4 < X ≤ 16	±0.08	±0.15	±0.3
16 < X ≤ 64	±0.12	±0.25	±0.5
64 < X ≤ 256	±0.2	±0.4	±0.8

UNIT : mm
SCALE : 1/2
TOLERANCE
LEVEL 3

DESCRIPTION OF REVISION

MODEL NAME: LTF320AP08
PART/SHEET NAME: OUTLINE DIM. (FRONT)
SPEC. NO: -
CODE NO.:
SHEET: 1/2
VER.: 000

SAMSUNG ELECTRONICS

NO	PART NAME	SPECIFICATION	CODE NO	Q'TY	SPEC NO	REMARK
1	OUTLINE DIMENSION	LTF320AP08	-	1	-	

306.7(LAMP SUPPORT AREA, HT MAX 3.5mm)

222.5±5

300.8±1

40±1

BEAD HT=1.0mm

APPROVAL

SAMSUNG ELECTRONICS

LTF320AP08

OUTLINE DIM. (REAR)

7. Reliability Test

Item	Test condition	Quantity
Temperature Step stress	-20℃～ 60℃, 10Cycle, 80hr	4EA
HTOL	50℃operation,1000hr	8EA
LTOL	0℃operation, 1000hr	4EA
LTOL 2	-20℃, -10 ℃ Each condition over 5hr off, over 1hr on	4EA
HTS	70℃storage, 500hr	4EA
LTS	-30℃storage, 500hr	4EA
THB	40℃ / 95%RH, 30sec On / Off , 500hr operation	4EA
WHTS	60℃ / 75%RH, 500hr	4EA
Thermal Shock	-20℃(30min)～60 ℃(30min) storage, 200cycle	4EA
ALTITUDE	-10℃～ 45℃, 0～ 40,000fit , 18hr	2EA
ESD	contact : ±8 kV ,150pF/330Ω,200Point,1 time/Point (operation) non-contact : ±15 kV,150pF/330Ω,200Point,1 time/Point (operation) Inverter input pin : ±15 kV,150pF/330Ω , 3 times/Pin	3EA
Vibration	10~300Hz/1.5G/10minSR, XYZ, 30min/axis	3EA
Shock	11msec, ±XYZ 1time/axis ~15Kg 50G, 11msec 15Kg ~ 20Kg ±XY 40G ±Z 30G, 11msec 20Kg ~ 30G, 11msec	3EA
Noise	On 90 min / Off 90 min	2 EA
Dust	5hr on/off (yellow earth 5sec spread / 5 min precipitation)	2 EA
Short term Image sticking	25~50℃ Mosaic pattern (9*10) 12hr fix	8 EA
Long term Image sticking	50℃ Mosaic pattern (9*10) 504hr fix	4 EA
PALLET Vibration	1.05 Grms, Random, Z axis 1Hr	1PALLET(24EA)
PALLET Drop	20cm, 4Edge(Bottom), 1Face(Bottom)	1PALLET(24EA)

[Result Evaluation Criteria]

Under the display quality test conditions with normal operation state, these should be no change which may affect practical display functions.

```
*    HTOL/ LTOL  : High/Low  Temperature Operating Life
**   THB          : Temperature Humidity Bias
*** HTS/LTS      : High/Low Temperature Storage
**** WHTS        : Wet High Temperature Storage
```

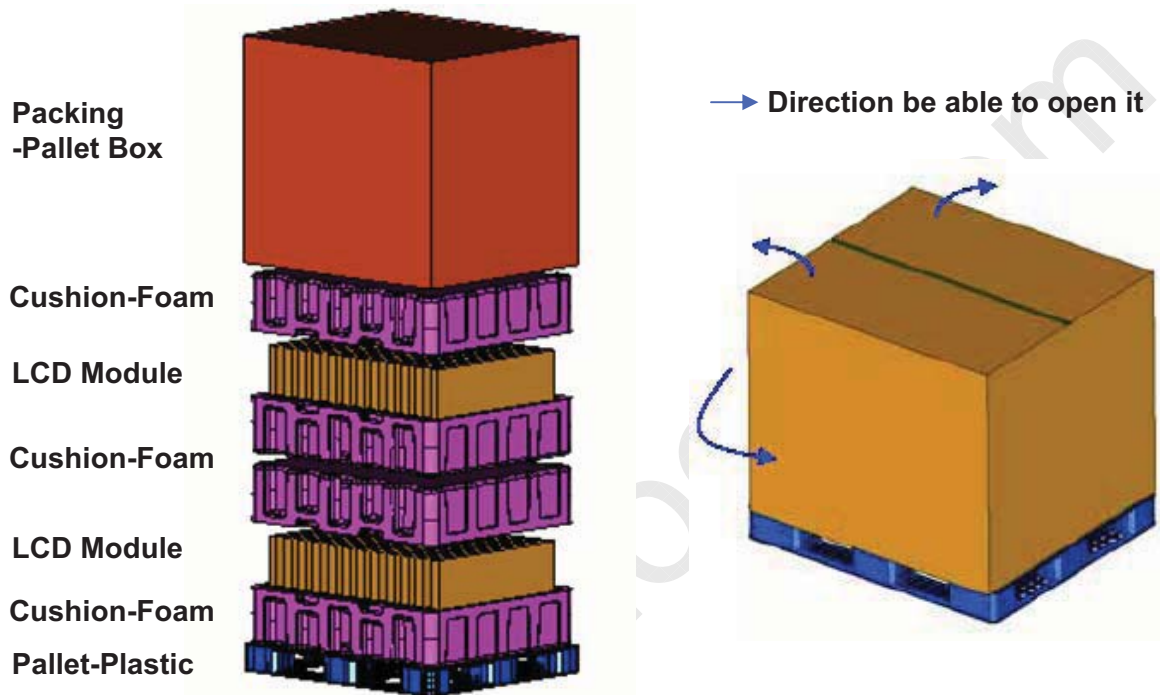| MODEL	LTA320AP08	Doc. No	06-000-S-100316	Page	24/29

8. PACKING

8.1 CARTON (Internal Package)

(1) Packing Form
Corrugated fiberboard box and corrugated cardboard as shock absorber

(2) Packing Method

Packing -Pallet Box

Cushion-Foam

LCD Module

Cushion-Foam

LCD Module

Cushion-Foam

Pallet-Plastic

→ **Direction be able to open it**

8.2 Packing Specification

Item	Specification	Remark
LCD Packing	24ea / (Packing-Pallet Box)	1. 6.5kg/LCD(24ea) 2. 3.5kg/Cushion-SET(4ea) 3. 8.8kg/Packing-Pallet Box(1ea) (1137×972×1025) 5. Cushion Material : EPS 6. Packing Pallet Box Material : DW4
Pallet	1Box / Pallet	1.Pallet weight = 8kg 2. 191kg/Pallet , Total : 199kg/Pallet
Packing Direction	Vertical	1150 x 985 x 1161
Total Pallet Size	H x V x height	1150mm(H) x 985mm(V) x 1161mm(height)
Total Pallet Weight	186.8 kg	Pallet(8kg) + Module(156kg) + Cushion(up+botton=14kg) + Pallet-BOX(8.8kg)

MODEL	LTA320AP08	Doc. No	06−000−S−100316	Page	**25/29**

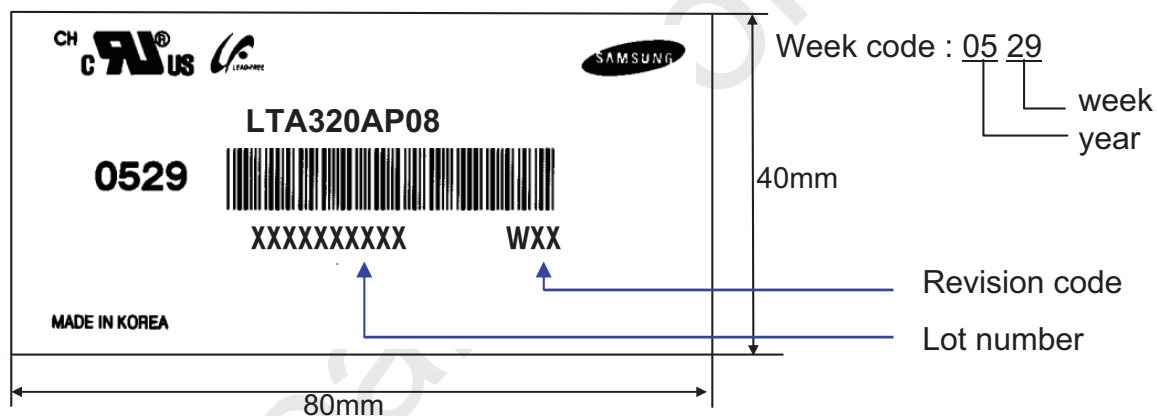## 9. MARKING & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.

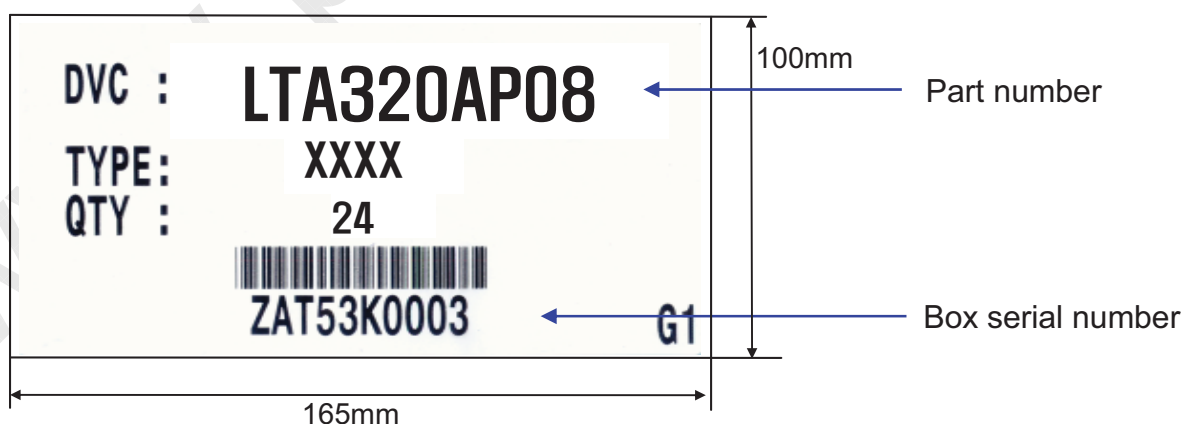　(1) Parts number : LTF320AP08
　(2) Revision:　Three letters
　(3) Lot number : X X X X XXX XX X

- Cell Position No. (In the Glass)
- Glass No. (In the one Lot)
- Lot No. (Glass)
- Month
- Year (Note1)
- Product code
- Line

(4) Nameplate Indication

Week code : 05 29
— week
— year

LTA320AP08
0529
XXXXXXXXXX　WXX
MADE IN KOREA

40mm
80mm

Revision code
Lot number

(5) Packing box attach

DVC : LTA320AP08
TYPE: XXXX
QTY : 24
ZAT53K0003　G1

100mm
165mm

Part number
Box serial number
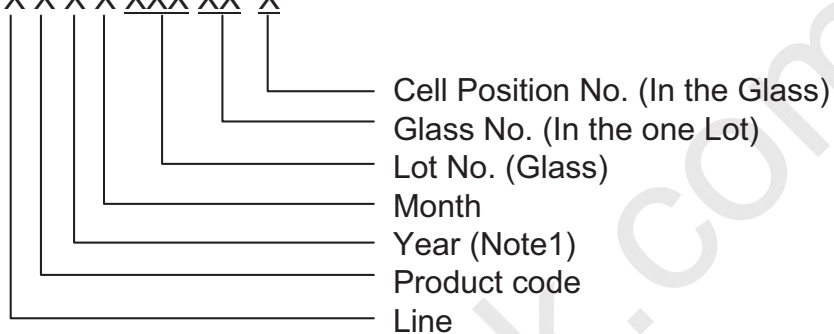
(6) Others
　1. After service part
　　Lamps cannot be replaced because of the narrow bezel structure.

| MODEL | LTA320AP08 | Doc. No | 06-000-S-100316 | Page | 26/29 |

10. General Precautions

10.1 Handling

(a) When the Module is assembled, it should be attached to the system firmly using all mounting holes. Be careful not to twist and bend the Module.

(b) Because the inverter use high voltage, it should be disconnected from power before it is assembled or disassembled.

(c) Refrain from strong mechanical shock and / or any force to the Module. In addition to damage, this may cause improper operation or damage to the Module and CCFL back light.

(d) Note that polarizers are very fragile and could be damage easily. Do not press or scratch the surface harder than a HB pencil lead.

(e) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining or discoloration may occur.

(f) If the surface of the polarizer is dirty, clean it using absorbent cotton or soft cloth.

(g) Desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane. Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.

(h) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away with soap thoroughly.

(i) Protect the module from Electrostatic discharge. Otherwise the ASIC IC or Semiconductor would be damaged.

(j) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.

(k) Do not disassemble the Module.

(l) Do not disassemble shield case of inverter & LVDS board.

(m) Do not connect N.C pins. (Samsung internal use only)

(n) Protection film for polarizer on the Module should be slowly peeled off just before use so that the electrostatic charge can be minimized. Must put on antistatic glove while handle a module

(o) Pins of I/F connector should not be touched directly with bare hands.

MODEL	LTA320AP08	Doc. No	06-000-S-100316	Page	**27/29**

10.2 Storage

(a) Do not leave the Module in high temperature, and high humidity for a long time.
It is highly recommended to store the Module with temperature from 0 to 35℃
and relative humidity of less than 70%.

(b) Do not store the TFT-LCD Module in direct sunlight.

(c) The Module should be stored in a dark place. It is prohibited to apply sunlight or
fluorescent light in storing.

10.3 Operation

(a) Do not connect or disconnect the Module in the "Power On" condition.

(b) Power supply should always be turned on/off by the "Power on/off sequence"

(c) Module has high frequency circuits. Sufficient suppression to the electromagnetic
interference should be done by system manufacturers. Grounding and shielding methods
may be important to minimize the interference.

(d) The cable between the back light connector and its inverter power supply should
be connected directly with a minimized length. A longer cable between
the back light and the inverter may cause lower luminance of lamp(CCFT) and
may require higher startup voltage(Vs).

10.4 Operation Condition Guide

(a) The LCD product should be operated under normal conditions.
Normal condition is defined as below;
- Temperature : 20 ± 15℃
- Humidity : 55 ± 20%
- Display pattern : continually changing pattern (Not stationary)

(b) If the product will be used in extreme conditions such as high temperature,
humidity, display patterns or operation time etc.., It is strongly recommended
to contact SEC for Application engineering advice. Otherwise, its reliability and
function may not be guaranteed. Extreme conditions are commonly found at
Airports, Transit Stations, Banks, Stock market, and Controlling systems.

MODEL	LTA320AP08	Doc. No	06-000-S-100316	Page	28/29

10.5 Others

(a) Ultra-violet ray filter is necessary for outdoor operation.

(b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.

(c) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on)
Otherwise the Module may be damaged.

(d) If the Module keeps displaying the same pattern for a long period of time, the image may be "sticked" to the screen.
To avoid image sticking, it is recommended to use a screen saver.

(e) This Module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.

(f) Please contact SEC in advance when you display the same pattern for a long time.

MODEL	LTA320AP08	Doc. No	06-000-S-100316	Page	29/29